
Accessory (Corresponding Model No. LC / TC-C : Gasket Option)

• Appropriate Measures for Air Vent Ports

The work support, although only slightly, breathes like a single-acting cylinder. Consider the environment and avoid cutting fluid, coolant or any contaminants. If using it without an air vent port, it may not function properly.




Model No . Indication -

XLC-VENT

Specifications -

Model No.		XLC-VENT
Filtration Precision of Filter	$\mu{ m m}$	40
Tightening Torque	N∙m	2

Internal Structure -

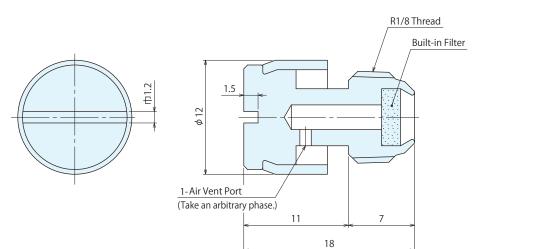



High-Power Series

Pneumatic Series

Hydraulic Series

Valve / Coupler Hydraulic Unit

Manual Operation Accessories

Cautions / Others

Hole Clamp	
SFA	
SFC	
Swing Clamp	
LHA	
LHC	
LHS	
LHW	
LG/LT	
TLA-2	
TLB-2	
TLA-1	
Link Clamp	
LKA	
IKC	

LKC	
LKW	
LJ/LM	
TMA-2	
TMA-1	

Work	Support	
	LD	
	LC	
	TNC	

Air Sensing Lift Cylinder
LLW

ar Cylinder / pact Cylinder
LL
LLR
LLU
DP
DR
DS
DT

Block Cylinder

DBA/DBC Centering Vise

> FVA FVD FVC

Control Valve

BZL BZT BZX/JZG BZS

Pallet Clamp

VS/VT

Expansion Locating Pin VFL/VFM VFJ/VFK

Pull Stud Clamp FP

FQ

Customized Spring Cylinder DWA/DWB